

■ PRODUCT FEATURES

* Sensor (CCD)

COLOUR 1/3" High Resolution CCD sensor.

* Auto Gain Control (AGC)

Built-in auto gain control (AGC) circuit. The colour camera can achieve high quality images in low Lux conditions

* Auto Electronic Shutter (AES)

Built-in auto electronic shutter function. The colour camera's AES speed can reach 1/100,000s.

* Gamma Characteristic

Camera Gamma characteristic is **0.45**.

* Scanning Mode

NTSC or PAL mode.

* Night-time Vision


0 Lux with IR LED ON. High quality IR LED's provide night-vision effect.



Notes :

- Please ensure the correct specification power supply is used. Check voltage, polarity and operating temperature match the camera's requirement.
- Lightning protection is recommended for use with camera equipment. If not installed, in electrical storms, camera equipment should be disconnected.

■ CONNECTIONS

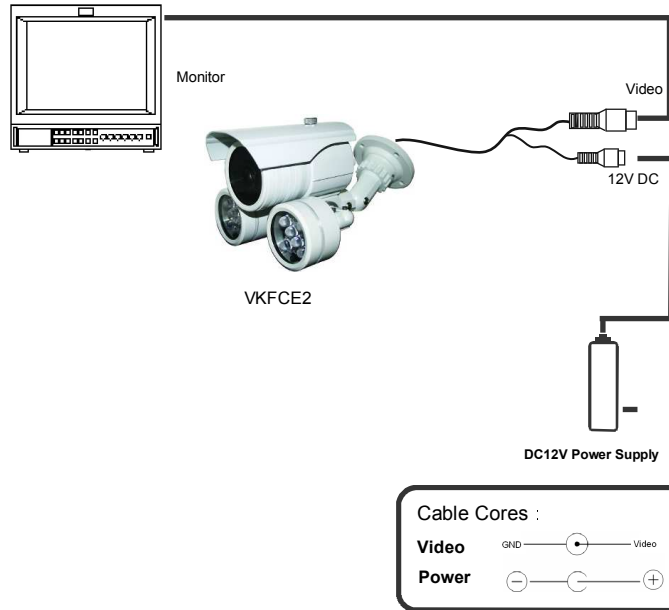

■ TROUBLE SHOOTING

1. No Picture after providing power

- . May be the power supply. please check the power supply voltage and polarity.
- . Please check all the connecting cables to monitoring equipment, especially the 'BNC' connectors.

2. The picture shows 'rolling' interference ripples

- . May be caused by induced AC voltage on to video cables. Check for AC cables near video cables & move as necessary.
- . Check the earth potentials at monitor and peripheral equipments positions. Earth potentials should be the same at each position.

3. The picture background colour changes continuously

- . The fluorescent lamp's electromagnetic field causes colour roll. This is a normal phenomenon of the camera.
- . Reduce the fluorescent lamp numbers or increase the distance between the camera and the fluorescent lamps.

4. The picture 'smear's'

- . The power supply's voltage unstable.
- . Cables not connected correctly or have high impedance.

■ INTRODUCTION

Congratulations on your purchase of this FACINA product. This VKFCE2 is a high quality day / night camera with long range LED illumination, externally adjustable varifocal lens & a sturdy cable managed mounting bracket.

The camera can be used indoors or outdoors & has a removable sun shield.

Please read this instruction manual carefully before installation to ensure correct use of the product.



To prevent fire or shock hazarded. Do not immerse the unit into water.



The symbol is intended to alert the user to the presence of important operating and maintenance (servicing) Instructions in the literature accompanying the appliance.



The symbol is intended to alert the user to the presence of uninsulated 'dangerous voltage' within the product's enclosure that may be of sufficient Magnitude to constitute a risk of electric shock.

	CAUTION: RISK OF ELECTRIC. DO NOT OPEN	
SHOCK CAUTION: TO REDUCE THE RISK OF ELECTRIC DO NOT REMOVE COVER OR BANCK NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING		

CAUTION:

To prevent electric shocks and risk of fire hazards, do NOT use other than specified power source.



Note:

- Please note the camera's operating temperature and its using environment requirement. Avoid using the camera at too high or too low temperatures. The operating temperature is -10°C-50°C. (Recommendatory operating temperature is -5°C-40°C.)
- Never make the camera face the sun or bright object. Otherwise, it will damage the CCD.
- Do not mount the camera near by a radiator or heater.

■ Specification

Model	VKFCE2
Pick Up Element	COLOUR 1/3"CCD
Effective Picture Elements (H*V)	976×582
Horizontal Resolution	700 TV Lines
S/N Ratio	More than 48dB
Clock Frequency (MHZ)	36
Scanning System	2:1 interlace
Minimum Illumination	0 Lux (with IR LED ON)
Synchronous System	Internal, Negative sync.
Auto Electronic Shutter	1/50s~1/100,000s
Gamma Characteristic	0.45
IR Distance	Up to 50 Meters (with 6 Unit Infrared LED)
IR Status	Under 10 Lux by CDS
IR Power On	CDS Auto Control
Video Output	1Vpp,75 Ω
Auto Gain Control	Auto
Power/Current	12VDC(±10%)/ 1000mA
Lens	9-22 mm
Water Resistance	IP66
Dimension (mm)	186(W)×122(H)×118(D)
Weight (g)	1500
Storage Temperature	-30~ +60°C RH95% Max
Operating Temperature	-10~ +45°C RH95% Max

■ Packing List

No	Name	Model	Number
1.	WeatherProof Day&Night IR Camera	VKFCE2	1
2.	User Guide		1

FACINA

SURVEILLANCE

VKFCE2

Weatherproof Day & Night IR Colour Camera



Notes:Please read this User Guide in detail prior to installation.

Do not attempt to disassemble the camera. If the camera does not work, please contact Facina technical on Tel: 01253 792898

FACINA

SURVEILLANCE

Distributed by

Audio Visual Security

4 Arkwright Court
Fylde Industrial Estate
Blackpool
FY4 5DR

Tel: 01253 830904

Fax: 01253 830905

Email: enquiries.av@adivision.co.uk

Web: www.audiovisualecurity.org.uk

This document was created with Win2PDF available at <http://www.win2pdf.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.
This page will not be added after purchasing Win2PDF.