

LED LANTERN LIGHT Model: SL30S SL30SW

■ WHILE TO FIT YOUR FLOODLIGHT

To achieve best results, we suggest you take into account the following points:

- Not to mount on any vibrating surfaces.
- Ideally, the light should be mounted 1.5 to 2.5 meters above the ground(Ref. to Fig.1A).

■ INSTALLATION

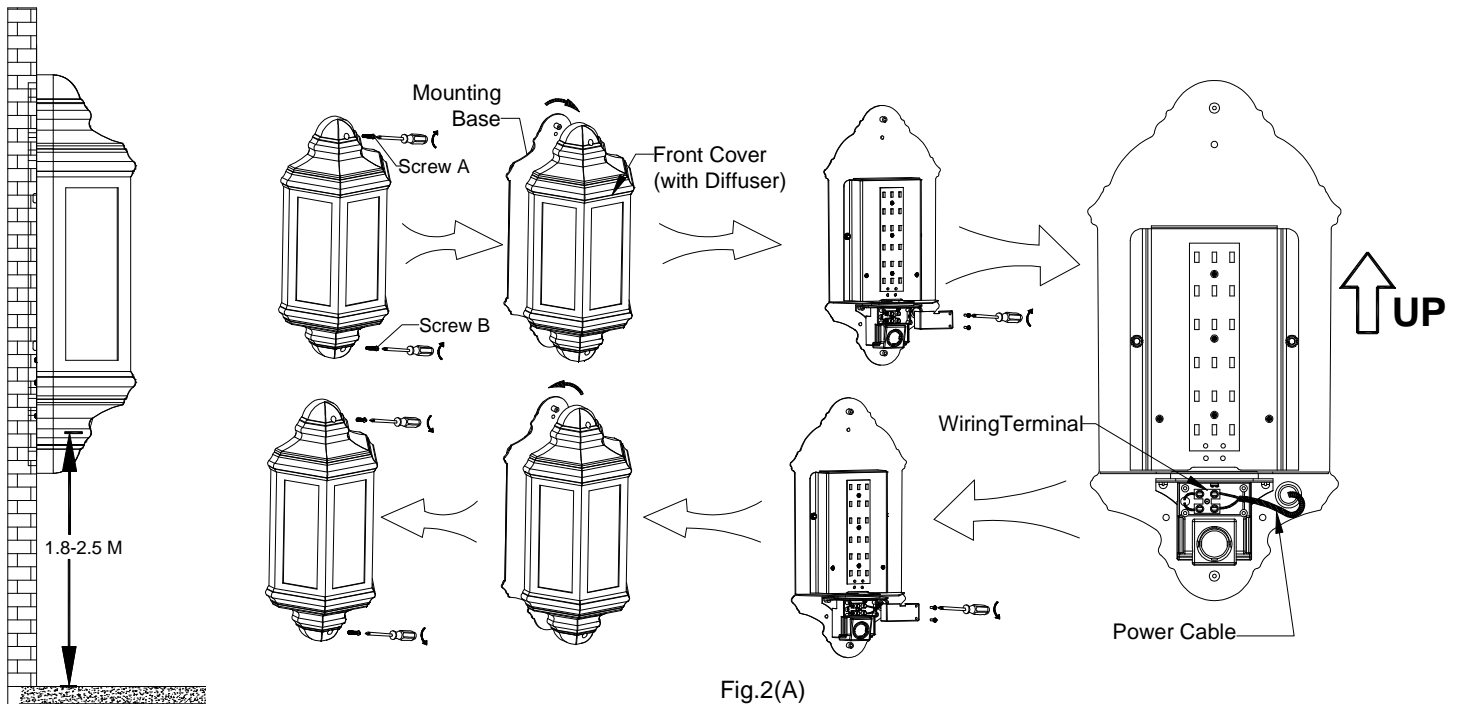


Fig.1(A)

Fig.2(A)

Before commencing any electrical work, ensure mains supply cables are isolated by switching off and removing the relevant fuse.

1. Installation by a licensed electrician and according to IEC wiring Regulation.
2. Switch power off at the meter box and ensure that there is no power to the light.
3. **IMPORTANT: DO NOT INVERT THE LANTERN.**
4. Un-screw the **Screw A** and **Screw B** as the Fig.2(A)
5. Remove the **Front Cover (with diffuser)**, please note: **Open the Front Cover from the position of Screw A (showed as Fig.2 (A))**.
6. Use the **Mounting Base** to mark the position of Fixing Wall Screw holes onto mounting surface. Then drill the wall to depth of about 4 cm with a No.8 size bit.
7. Pierce the **Wiring Rubber** and bring **Power Cable** through.
8. Fit the **Mounting Base** onto the mounting wall with **Fixing Wall Screws** and Plastic Rawl-plugs
9. Connect **Power Cable** to the **Terminal Block**
10. Re-fit the Front Cover onto the Body again

■ Specifications

- **Voltage:** 220-240 V~ 50 Hz
- **Wattage:** Max. 18x0.5W LED

Due to our policy of continuous improvement we reserve the right to change specification without prior notice.

Errors and omissions excepted. These instructions have been carefully checked prior to publication. However, no responsibility can be accepted by Challenger Security Products for any misinterpretation of these instructions.



CHALLENGER SECURITY PRODUCTS

10 Sandersons Way, Marton,
Blackpool, FY4 4NB

Tel :01253 791888 Fax:01253 791887

Email: enquiries.challenger@adivision.co.uk

Website: www.challenger.co.uk