


2AMP SUPERVISED POWER SUPPLY/CHARGER

DESCRIPTION:


A charger and a regulated power-limited supply, the FTPSU2 converts 220V AC input into a 12VDC power limited output, with 2A of continuous supply current.

SPECIFICATIONS

- 2 amp continuous supply current at 12VDC.
- Filtered and electronically regulated output.
- Built-in charger for sealed lead acid or gel type batteries.
- Maximum Charge current 120mA
- Automatic switchover to stand-by battery when AC fails.
- Fuse power input/output protection.
- Unit in complete with power supply, battery leads and enclosure.
- Enclosure Dimensions: 185mm(W)x235mm(H)x80mm(D)

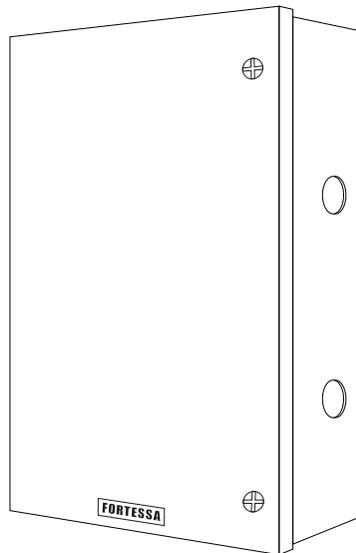

Wiring Diagram:

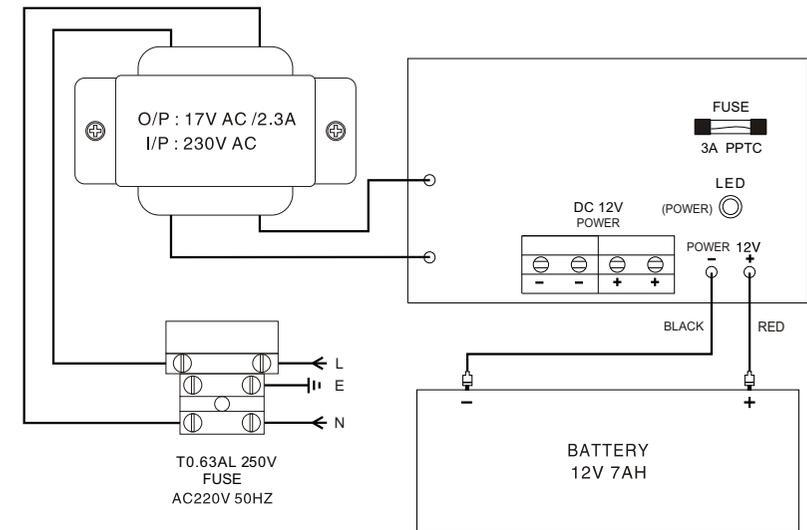

Distributed by :
Audio Visual Security
Unit 4 Arkwright Court
Fylde Industrial Estate
Blackpool
Lancashire
FY4 5DR England
Sales : 01253 791888
Technical: 01253 792898
Fax : 01253 791887
General Enquiries : sales.av@adivision.co.uk
www.audiovisualecurity.org.uk

